



Project Descriptions

BATHROOM ADDITION-MIDRANGE

Add 6x8-foot bathroom over crawlspace with poured concrete walls. Use cultured-stone vanity top with molded sink; standard chrome faucets; 30x60-inch white fiberglass tub/shower with ceramic tile surround; single-lever temperature and pressure-balanced faucet; white low-profile toilet; general and spot lighting; electrical wiring to code; mirrored medicine cabinet; linen storage closet or cabinet; painted trim; ceramic tile floor; finish with painted walls, trim, and ceiling.

BATHROOM ADDITION-UPSCALE

Add new 100-square-foot master bath to existing master bedroom over crawlspace. Include 42x42-inch neo-angle shower with ceramic tile walls, accent strip, recessed shower caddy, body-spray fixtures, and frameless glass enclosure. Put in freestanding soaker tub with highend faucets; stone countertop with two sinks; two mirrored medicine cabinets with lighting; a compartmentalized commode area with one-piece toilet; and a humidistat-controlled exhaust fan. Use larger matching ceramic tiles on the floor, laid on diagonal with ceramic tile base molding. Add general and spot lighting and waterproof shower fixture. Cabinetry has custom drawer base, wall cabinets. Extend HVAC. Electric in-floor heating.

BATH REMODEL-MIDRANGE

Update existing 5x7-foot bathroom. Replace all fixtures to include 30x60-inch porcelain-on-steel tub with 4x4-inch ceramic tile surround; new single-lever temperature and pressure-balanced shower control; standard white toilet; solid-surface vanity counter with integral sink; recessed medicine cabinet with light; ceramic tile floor; finish with painted walls, trim, and ceiling.

BATH REMODEL-UPSCALE

Expand existing 35-square-foot bathroom to 100 sf within existing house footprint. Relocate all fixtures. Include 42x42-inch

neo-angle shower with ceramic tile walls with accent strip, recessed shower caddy, body-spray fixtures, and frameless glass enclosure. Include freestanding soaker tub with high-end faucets; stone countertop with two sinks; two mirrored medicine cabinets with lighting; a compartmentalized commode area with one-piece toilet; and a humidistat-controlled exhaust fan. Use all color fixtures. Use larger matching ceramic tiles on the floor, laid on diagonal with ceramic tile base molding. Add general and spot lighting including waterproof shower fixture. Cabinetry has custom drawer base, wall cabinets. Extend HVAC. Electric in-floor heating.

UNIVERSAL DESIGN BATH REMODEL

Update existing 5x7-foot space to be wheelchair-accessible (zero-threshold, 36-inch-wide door) and install flat-panel electrical switches at sitting level (36 to 42 inches above floor). Replace toilet with comfort height fixture featuring elongated bowl and bidet-type seat. Remove existing bathtub and install curbless, tiled, walk-in shower with adjustable showerhead, foldout seat, thermostatic mixing valve, and bi-directional glass door. Replace flooring with electric radiant heat beneath new luxury vinyl tile flooring. Install adaptive living vanity with easy-grasp handles and adjustable mirror. Install LED lights, infrared ceiling light, night light, and ultra-quiet vent fan with humidity-sensing controls. Install ceramic tiles on walls with two contrasting color stripes. Install nine towel bars that can support 250 pounds and reconfigure storage to be accessible from a seated position.

MINOR KITCHEN REMODEL-MIDRANGE

In functional but dated 200-square-foot kitchen with 30 linear feet of cabinetry and countertops, leave cabinet boxes in place but replace fronts with new shaker-style wood panels and drawer fronts, including new hardware. Replace cooktop/oven range and slide-in refrigerator with new energy-efficient models. Replace laminate

countertops; install midpriced sink and faucet. Add new resilient flooring. Finish with painted walls, trim, and ceiling.

MAJOR KITCHEN REMODEL-MIDRANGE

Update outmoded 200-square-foot kitchen with functional layout of 30 linear feet of semi-custom wood cabinets, including 3x5-foot island; laminate countertops; and standard double-tub stainless-steel sink with standard single-lever faucet. Include energy-efficient range, vented range hood, built-in microwave, dishwasher, garbage disposal, and custom lighting. Add new resilient flooring. Finish with painted walls, trim, and ceiling.

MAJOR KITCHEN REMODEL-UPSCALE

Update outmoded 200-square-foot kitchen with 30 linear feet of top-of-the-line custom white cabinets with built-in sliding shelves and other interior accessories. Include stone countertops with imported ceramic- or glass-tile backsplash; built-in refrigerator, commercial-grade cooktop and vent hood, wall oven, and built-in microwave unit. Install high-end undermount sink with designer faucets and water filtration system. Add new general and task lighting, including low-voltage undercabinet lights. Install tile or similar flooring that looks like wood.

MASTER SUITE ADDITION—MIDRANGE

Add 24x16-foot master bedroom suite over crawlspace. Include walk-in closet/dressing area, freestanding soaker tub, separate 3x4-foot ceramic tile shower, and double-bowl vanity with solid-surface countertop. Carpet the bedroom floor; put tile in bath. Paint walls, ceiling, and trim. Install general and spot lighting, exhaust fan.

MASTER SUITE ADDITION—UPSCALE

Add 32x20-foot master bedroom suite over crawlspace. Add spacious sleeping area with lounging/sitting area adjacent to large master bath. Include custom bookcases and built-in storage with millwork details; high-end gas fireplace with stone hearth and custom mantel; and walk-in closet/



dressing area with natural light, mirrors, and linen storage. Add French doors. Bathroom includes walk-in shower with dual-shower system, stone walls and floor, and custom frameless glass enclosure. Add freestanding soaker tub. Include two sinks in separate custom vanities with stone countertops and large mirrors. Create partitioned area for luxury one-piece toilet. Outside the bath, add 5-foot-long hospitality center with bar sink, undercounter refrigerator, custom cabinetry, stone countertop, and microwave. Include soundproofing, in-floor heating, custom wall finishes and hardware, general and spot lighting, and high-end lighting controls.

DECK ADDITION—COMPOSITE

Add 16x20-foot deck using pressure-treated joists supported by 4x4-inch posts anchored to concrete piers. Install composite deck material in a simple linear pattern. Include built-in bench and planter of the same decking material. Include stairs, assuming three steps to grade. Provide a complete railing using a matching system made of the same composite as the decking material.

DECK ADDITION-WOOD

Add 16x20-foot deck using pressure-treated joists supported by 4x4-inch posts anchored to concrete piers. Install pressure-treated deck boards in a simple linear pattern. Include built-in bench and planter of the same decking material. Include stairs, assuming three steps to grade. Provide a complete railing system using pressure-treated wood posts, railings, and balusters.

ENTRY DOOR REPLACEMENT—STEEL

Remove existing 3-0/6-8 entry door and jambs and replace with new 20-gauge steel unit, including a clear, dual-pane half-glass panel, jambs, and aluminum threshold with composite stop. Door is factory finished with same color both sides. Exterior brickmold and 2.5-inch interior colonial or ranch casings in poplar or equal prefinished to match door color. Replace existing lockset.

GRAND ENTRANCE-FIBERGLASS

Remove existing 3-0/6-8 entry door and cut and reframe opening for a 12-36-12 entrance door with dual sidelights. Move doublegang electrical box with two switches. Fiberglass door blank matches upscale entry, including color, threshold, lockset, and decorative half-glass; sidelights match door. PVC-wrapped exterior trim in color to match existing trim; wider interior colonial or ranch casings (3.5-inch to cover new jack studs) in hardwood stained to match door. All work to be completed in one day.

GARAGE DOOR REPLACEMENT

Remove and dispose of existing 16x7-foot garage door and tracks. Install new four-section garage door on new heavy-duty galvanized steel tracks; reuse existing motorized opener. New door has a lifetime warranty, and is made with high-tensile-strength steel with two coats of factory-applied paint, is foam insulated to minimum R-12, and includes thermal seals between pinch-resistant panels. Windows in top panel are ½-inch insulated glass. Hardware includes galvanized steel hinges and ball-bearing urethane rollers.

MANUFACTURED STONE VENEER

Remove 300-square-foot continuous band of existing vinyl siding from bottom third of street-facing façade. Replace with adhered manufactured stone veneer, including 36 linear feet (LF) of sills, 40 LF of corners, and one address block. Installation includes two separate layers of water-resistive barrier laid over bare sheathing, corrosion-resistant lath and fasteners, and nominal ½-inch-thick mortar scratch coat and setting bed. Outline entry archway; use an 8x10-inch keystone and a soldier course of flats on either side.

SIDING REPLACEMENT—FIBER CEMENT

Replace 1,250 square feet of existing siding with new fiber-cement siding, factory primed and factory painted, and installed to manufacturer's specifications. Include factory trim at all openings and corners.

SIDING REPLACEMENT-VINYL

Replace 1,250 square feet of existing siding with new vinyl siding installed to manufacturer's specifications. Include factory trim at all openings and corners.

WINDOW REPLACEMENT-VINYL

Replace 10 existing 3x5-foot doublehung windows with insulated, low-E, simulated-divided-light vinyl windows with a custom-color exterior finish. Trim exterior to match existing; do not disturb existing interior trim.

WINDOW REPLACEMENT—WOOD

Replace 10 existing 3x5-foot doublehung windows with insulated, low-E, simulated-divided-light wood windows. Interior finish of stained hardwood; exterior finish of custom-color aluminum cladding. Trim exterior to match existing; do not disturb existing interior trim.

ROOFING REPLACEMENT— ASPHALT SHINGLES

Remove and dispose of existing roofing to bare wood sheathing. Install 30 squares of min. 235-lb. fiberglass asphalt shingles (min. 25-year warranty) with new 30-lb. felt (or equivalent synthetic) underlayment, galvanized drip edge, and mill-finish aluminum flashing.

Assume a rectangular hip roof; custom flashing at two average-size skylights; and custom cap treatment at vented ridge.

ROOFING REPLACEMENT-METAL

Remove and dispose of existing roofing to bare wood sheathing. Install ice-barrier membrane at roof perimeter, and premiumgrade synthetic underlayment over roof. Install 3,000 square feet of prefinished, standing-seam metal roofing with matching pre-formed accessories, including drip edge, gable trim, and vented ridge flashing. Assume a rectangular hip roof; custom flashing at two average-size skylights; custom cap treatment at vented ridge.





Reuse and Licensing of Data

COPYRIGHTED MATERIAL

The Remodeling Cost vs. Value Report contains copyrighted material that is being made available in free downloadable PDF documents as a public service. Any reuse without express permission is prohibited, including but not limited to the following:

- 1. RESALE. The Cost vs. Value Report, whether in whole or part, may not be reproduced and sold in any format, including print, digital, electronic file, fax, or other medium.
- 2. PUBLICATION OF DATA. The Cost vs. Value Report, whether in whole or part, may not be distributed or published in any format, including print, digital, electronic file, fax, or other medium without obtaining express permission.
- 3.APPLICATIONS/SOFTWARE. The Cost vs. Value Report, whether in whole or part, may not be incorporated for use in any kind of computer- or Web-based application, calculator, database, or other automated, electronic, or digital device, instrument, or software except as licensed by Zonda Media (see Licensing, below).

EXCERPTING COST VS. VALUE REPORT DATA

Excerpts of Cost vs. Value Report data may not take the form of a chart or table that simulates the manner in which the data is displayed at www.costvsvalue.com.

Excerpts of Cost vs. Value Report data may, however, be made as part of a narrative, provided that the sum total of all excerpts from any publisher in all formats does not exceed data from more than five projects.

ACKNOWLEDGING COST VS. VALUE AS DATA SOURCE

When excerpting Cost vs. Value Report data, refer to the "2021 Cost vs. Value Report" and include the URL www.costvsvalue.com, as in the following examples:

- "... according to the 2021 Cost vs. Value Report (www.costvsvalue.com) ..."
- "... as compiled in the 2021 Cost vs. Value Report (www.costvsvalue.com)"

This form of citation should be used in the first instance on every page of a multipage online story that cites the Cost vs. Value Report on multiple pages. Subsequent references on a given page may be foreshortened to "Cost vs. Value Report."


All excerpts must be accompanied by one or more instances of the following acknowledgements of copyright:

"©2021 Zonda Media, a Delaware corporation. Complete data from the 2021 Cost vs. Value Report can be downloaded free at www.costvsvalue.com."

LICENSING OF 2021 COST VS. VALUE REPORT DATA

For permission to license data from the 2021 Cost vs. Value Report for use in any kind of computer, or Web-based application, calculator, database, or other automated, electronic, or digital device, instrument, or software, include the following in an email request to costvsvaluepermissions@zondahome.com

- a description of the application, calculator, or device for which use of the data is being requested. Include the length of time for which the license is sought.
- \bullet a detailed description of the material to be licensed (e.g., specific projects, cities, etc.).

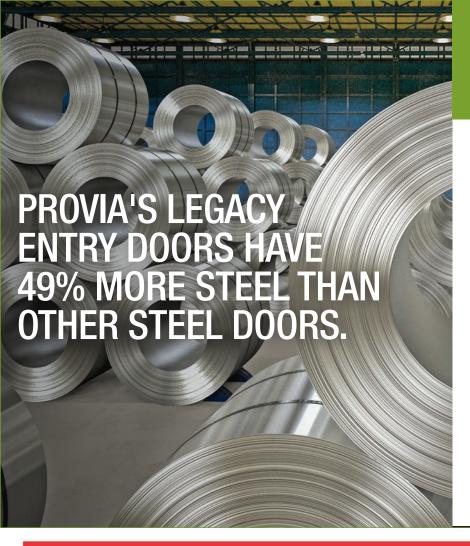

On top of that, our exclusive system of mechanical interlocks gives the door exceptional structural strength.

It's hard to tell by just looking at them, but a ProVia's Legacy™ 20-gauge steel doors give

you the added strength and durability of 49% more galvannealed steel than a standard 24-gauge door from the big box retailers.

The edges and face of a ProVia door are one continuous piece of steel, too. ProVia joins the front and sides with a Tab-and-Slot all-steel edge design to virtually eliminate bowing and warping. Learn more at provia.com/durable.



ProVia's Legacy Steel Doors. When Performance Matters.



DOORS | WINDOWS SIDING STONE | ROOFING

A REMODELING PROJECT you can take TO THE BANK



A top ranked project for return on investment

www.overheaddoor.com


Upgrading a garage door is one of the smartest investments a homeowner can make. In fact, according to the latest Cost vs. Value Report*, replacing a basic garage door with an upgraded one is one of the top ranked renovations in the study. Now, that's a return on investment you can take to the bank.

*Based on National Association of Realtors members included in Cost vs. Value Study for upscale projects rather than actual sales data. Complete data from the 2021 Cost vs. Value report can be downloaded at www.costversusvalue.com





Since 1921-

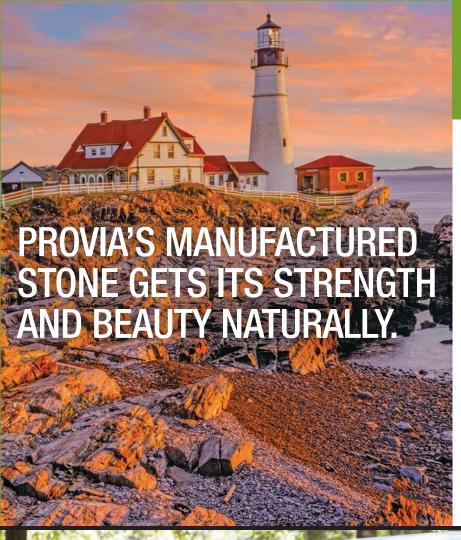

We employ the earth's best-quality elements to provide an authenticity and strength unmatched in our industry.

ProVia uses only heavy-duty Portland cement and the highest quality crushed-stone aggregates. Our

pigments and rich color palettes are all derived right from the earth.

We're proud to say our manufactured stone is certified by IAPMO, a designation awarded to fewer than 10% of the nation's stone manufacturers.

Learn more at provia.com/naturally.




ProVia's Manufactured Stone.

When Performance Matters.



DOORS | WINDOWS SIDING | STONE | ROOFING

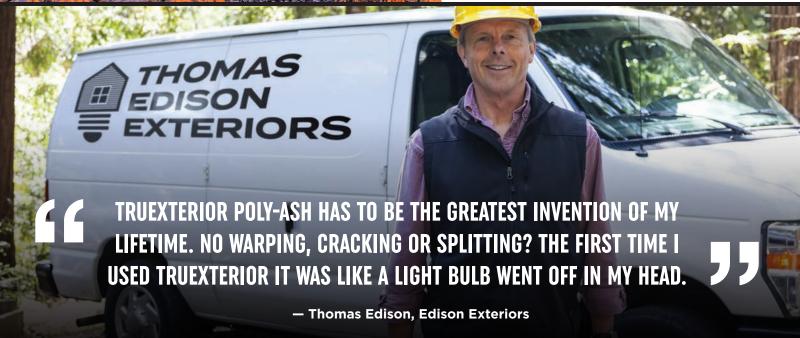


We've invented a new way to think about siding and trim.

TruExterior poly-ash siding was developed to deliver stability and durability, resisting the warping, cracking and splitting found in other products. If you're looking for workability and less maintenance with the authentic look of wood, you'll find it with TruExterior.

TruExterior.com







	ALBANY			MIDDLE ATLANTIC				2020 NATIONAL AVERAGES			
PROJECT TYPE	Job Cost	Resale Value	Cost Recouped	Job Cost	Resale Value	Cost Recouped		Job Cost	Resale Value	Cost Recouped	
Bathroom Addition Midrange	\$ 56,330	\$ 28,667	50.9%	\$ 61,202	\$ 31,151	50.9%		\$ 56,946	\$ 30,237	53.1%	
Bathroom Addition Upscale	103,799	58,064	55.9%	110,223	57,016	51.7%		103,613	54,701	52.8%	
Bath Remodel Midrange	24,548	13,399	54.6%	26,104	14,976	57.4%		24,424	14,671	60.1%	
Bath Remodel Upscale	75,201	42,469	56.5%	79,849	42,312	53.0%		75,692	41,473	54.8%	
Bath Remodel Universal Design	38,389	21,697	56.5%	40,525	23,571	58.2%		38,813	22,475	57.9%	
Minor Kitchen Remodel Midrange	25,780	17,695	68.6%	27,152	20,536	75.6%		26,214	18,927	72.2%	
Major Kitchen Remodel Midrange	74,601	35,834	48.0%	77,857	46,504	59.7%		75,571	43,364	57.4%	
Major Kitchen Remodel Upscale	146,014	66,491	45.5%	153,023	81,860	53.5%		149,079	80,284	53.9%	
Master Suite Addition Midrange	157,761	115,894	73.5%	168,114	92,505	55.0%		156,741	85,672	54.7%	
Master Suite Addition Upscale	321,997	192,094	59.7%	341,930	169,714	49.6%		320,976	152,996	47.7%	
Deck Addition Composite	22,306	14,250	63.9%	23,511	15,082	64.1%		22,426	14,169	63.2%	
Deck Addition Wood	16,635	11,556	69.5%	18,255	12,215	66.9%		16,766	11,038	65.8%	
Entry Door Replacement Steel	2,043	991	48.5%	2,131	1,453	68.2%		2,082	1,353	65.0%	
Grand Entrance Fiberglass	9,868	4,386	44.4%	10,229	7,045	68.9%		10,044	6,116	60.9%	
Garage Door Replacement	3,872	3,756	97.0%	3,976	3,697	93.0%		3,907	3,663	93.8%	
Window Replacement Vinyl	18,960	16,038	84.6%	19,719	13,472	68.3%		19,385	13,297	68.6%	
Window Replacement Wood	22,789	19,818	87.0%	23,549	16,618	70.6%		23,219	15,644	67.4%	
Siding Replacement Fiber-Cement	19,098	16,523	86.5%	20,914	15,325	73.3%		19,626	13,618	69.4%	
Siding Replacement Vinyl	16,112	10,335	64.1%	17,650	12,868	72.9%		16,576	11,315	68.3%	
Manufactured Stone Veneer	10,389	9,973	96.0%	10,748	9,876	91.9%		10,386	9,571	92.1%	
Roofing Replacement Asphalt Shingles	28,885	20,189	69.9%	31,562	18,180	57.6%		28,256	17,147	60.7%	
Roofing Replacement Metal	47,122	37,137	78.8%	49,517	25,986	52.5%		46,031	25,816	56.1%	

